

# Fuel Pressure Regulator Mini 5



- ▶ 5 bar
- ▶ 15 to 220 l/h reflow
- ► Adjusted at 105 l/h
- ► Sheet steel housing

Fuel pressure regulators are used to maintain constant fuel pressure at the injection valves.

We modified this production type based regulator especially for motorsport use and increased the pressure level.

The main benefit of this regulator include the competitively priced high quality and the high return flow rate.

## **Application**

Pressure range	5 bar
Reflow quantity	15 to 220 l/h
Reference pressure connector	Diam. 5 mm, tube connector
Fuel compatibility	Gasoline (E85 or M15 with shortened lifetime)
Operating temperature	-40 to 120°C
Storage temperature	-40 to 100°C
Max. vibration	$<600 \text{ m/s}^2 \text{ at 5 to 250 Hz}$
Valve leakage	$Q_{leck}[cm^3/min] \le 9$ (pneumatic)
	at p [kPa] = $0.8 \times P_{nom}$

# **Technical Specifications**

#### Mechanical Data

Diameter	34.9 mm
Weight	48.5 g
Mounting	Fastening with a clip

#### Characteristic

Set pressure accuracy ±:	2 %	at	105	i I	/ł
--------------------------	-----	----	-----	-----	----

#### **Connectors and Wires**

Connector supply	Diam. 25 mm, O-ring
Connector reflow	Diam. 9.15 mm, O-ring

# **Installation Notes**

The tube connector at the housing can be used to supply reference pressure to the regulator. This can be atmospheric pressure, air box pressure or manifold pressure.

Never run the regulator without the integrated filter.

Please oil O-rings lightly with clean and silicone free engine oil before you install the regulator.

Please make a leak test after you have installed the regulator.

When the pressure regulator is removed and will be reused, the O-rings must be tested for fractures.

Operation of the pressure regulator with a medium other than gasoline is not allowed.

This pressure regulator is not designed for in-tank mounting.


# **Ordering Information**


Fuel Pressure Regulator Mini 5 Order number 0280.B02.722-03

## **FPR Adaptor light**

Order number F02U.V02.248-01

# **Dimensions**

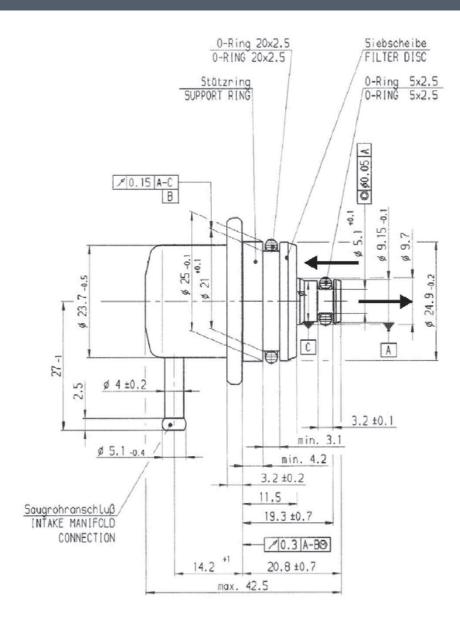

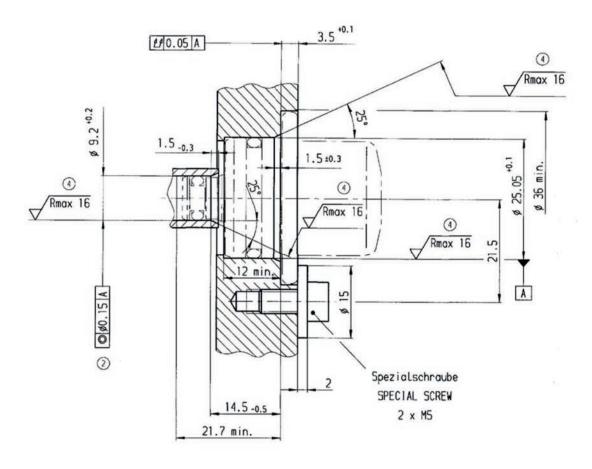

Installation Recommendation

### Represented by:

Europe:
Bosch Engineering GmbH
Motorsport
Robert-Bosch-Allee 1
74232 Abstatt
Germany
Tel.: +49 7062 911 9101
Fax: +49 7062 911 79104
motorsport@bosch.com
www.bosch-motorsport.de

North America:
Bosch Engineering North America
Motorsport
38000 Hills Tech Drive
Farmington Hills, MI 48331-3417
United States of America
Tel.: +1 248 876 2977
Fax: +1 248 876 7373
mptorsport/phosch com motorsport@bosch.com www.bosch-motorsport.com

Asia-Pacific:
Bosch Engineering Japan K.K.
Motorsport
18F Queen's Tower C, 2-3-5 Minato
Mirai Nishi-ku, Yokohama-shi
Kanagawa 220-6218
Japan
Tel.: +81 45 650 5610
Fax: +81 45 650 5611

www.bosch-motorsport.jp

Australia, New Zealand and South

Australia, New Zealand and Africa: Robert Bosch Pty. Ltd Motorsport 1555 Centre Road Clayton, Victoria, 3168 Australia Tel:. +61 (3) 9541 3901 motor.sport@au.bosch.com