

# HP Injection Valve HDEV 5.2



- ▶ Flow rate at 100 bar: up to 1,640 g/min (n-heptane)
- ▶ Max. 500 bar
- ▶ Multi hole
- ▶ Spray angle 8 to 20°

The HDEV 5.2 is a high pressure injector, which is developed to be used as a port or a direct injector. The function of the HDEV 5.2 is both to meter out the fuel and to obtain a well-defined mixture of fuel and air. It is an inward opening solenoid injector which is optimized regarding very short opening and closing times which ensures a very stable linearity at short injection times.

The benefit of this injector is a high spray variability concerning spray angle and spray shape. Also the flow rate can be defined in a big range. Bosch offers the spray targeting design according to the individual customer requirements. If your application conditions will not match the listed performance data, please ask for consultancy at Bosch Motorsport. In addition to the specific designed sample, Bosch offers cost effective production HDEV 5.2 on request.

## Application

Application at 100 bar (typical)	308 to 1,640 g/min
Fuel input	Top-feed injector
Fuel	Gasoline
Operating pressure	Up to 500 bar
Operating temperature range	-31 to 130°C
Storage temperature range	-40 to 70°C
Max. vibration	600 m/s <sup>2</sup>

## Technical Specifications

### Mechanical Data

Weight w/o wire	68 g
-----------------	------

Diameter	20.7 mm
Length	87 mm
Flow rate at 100 bar (n-heptane)	up to 1,640 g/min
Number of holes	4 to 7 holes (typical)
Spray type	Multi hole
Spray angle overall	110° (typical)
Spray angle single beam	8 to 20°
Static flow tolerance	±4 %
Dynamic flow tolerance	±6 % at ti = 1.5 ms
Leakage	≤2.5 mm <sup>3</sup> /min at 23°C

### Electrical Data

Booster supply	65 V
Booster current	13.4 A
Booster time	480 µs
Power supply	12 V
Pick up current	9.4 A
Pick up time	704 µs
Hold power supply	12 V
Hold current	3.7 A hysteresis 0.8 A
Coil resistance	1,500 mOhm (ambient temp.)

### Connectors and Wires

Mating connector Compact	D261.205.359-01
Connector Jetronic (wire)	D261.205.288-01
Connector motorsport (wire)	On request
Pin 1	Pos
Pin 2	Gnd

### Installation Notes

The injector has to be supplied by a Bosch Motorsport Power Stage Unit (e.g. HPI 5 or HPI 1.16).

Listed electrical values may vary according to the application.

The injector can be cleaned (mechanically or chemically), if the tip will not be damaged.


Do not use supersonic cleaning.

### Ordering Information


**HP Injection Valve HDEV 5.2**

Order number **on request**

### Dimensions

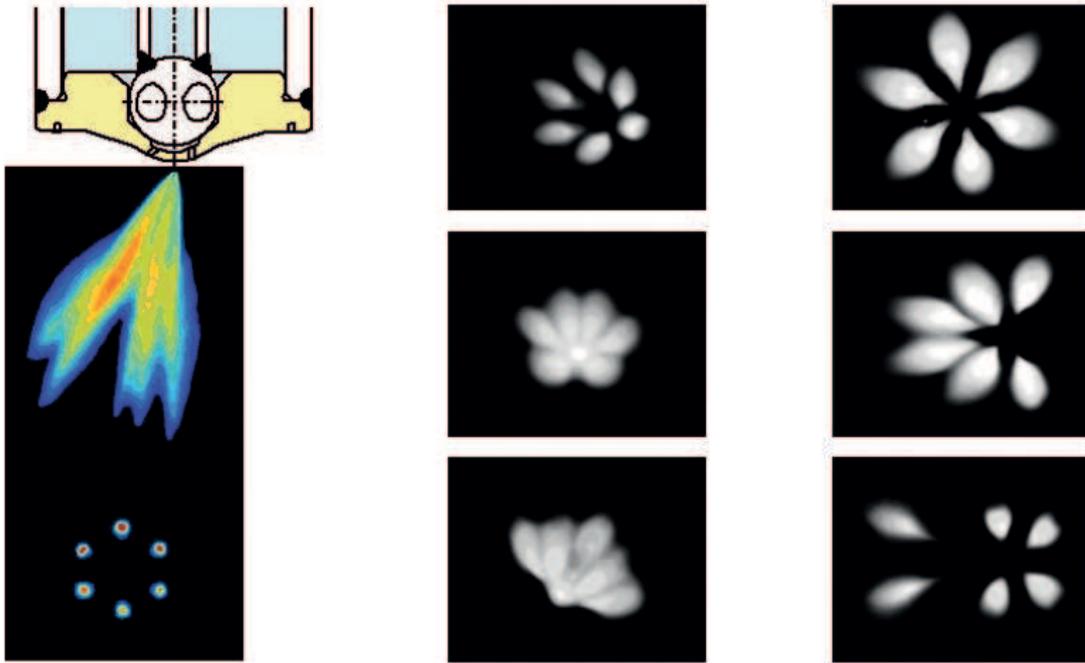

*Spray variations, further variations on request*

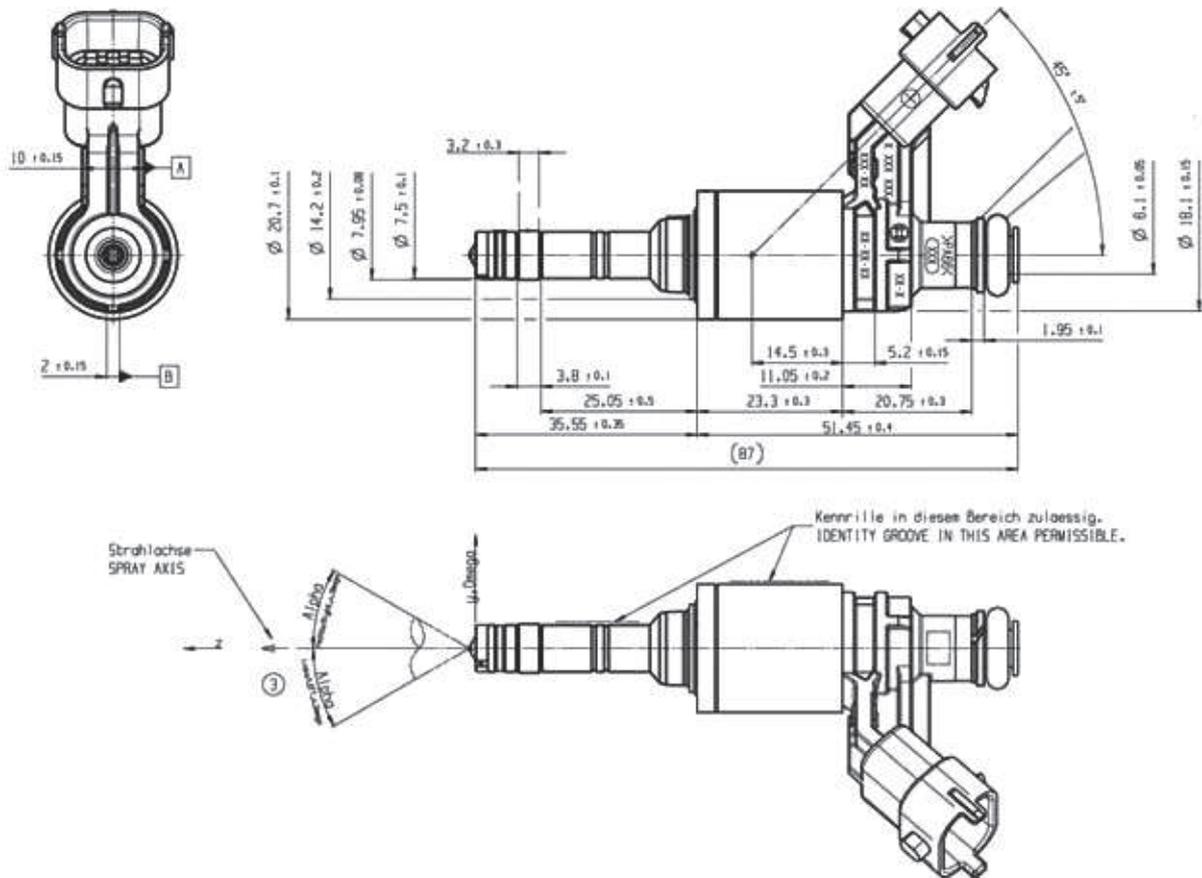

**Represented by:**

**Europe:**  
 Bosch Engineering GmbH  
 Motorsport  
 Robert-Bosch-Allee 1  
 74232 Abstatt  
 Germany  
 Tel.: +49 7062 911 9101  
 Fax: +49 7062 911 79104  
 motorsport@bosch.com  
 www.bosch-motorsport.de

**North America:**  
 Bosch Engineering North America  
 Motorsport  
 38000 Hills Tech Drive  
 Farmington Hills, MI 48331-3417  
 United States of America  
 Tel.: +1 248 876 2977  
 Fax: +1 248 876 7373  
 motorsport@bosch.com  
 www.bosch-motorsport.com

**Asia-Pacific:**  
 Bosch Engineering Japan K.K.  
 Motorsport  
 18F Queen's Tower C, 2-3-5 Minato  
 Mirai Nishi-ku, Yokohama-shi  
 Kanagawa 220-6218  
 Japan  
 Tel.: +81 45 650 5610  
 Fax: +81 45 650 5611  
 www.bosch-motorsport.jp

**Australia, New Zealand and South Africa:**  
 Robert Bosch Pty. Ltd  
 Motorsport  
 1555 Centre Road  
 Clayton, Victoria, 3168  
 Australia  
 Tel.: +61 (3) 9541 3901  
 motor.sport@au.bosch.com