

Ignition Coil P65-WS



- ▶ Max. 35 kV
- ▶ Max. 65 mJ
- ▶ Connection for high voltage wire according to SAE (American standard)
- ▶ Max. 10,000 1/min
- ▶ Developed for GDI engines

This single fire coil is a low cost concept, designed to get connected to the spark plug via a high voltage wire. The high voltage connector is specified according to the SAE standard.

The performance of the coil fulfills the demands of modern GDI engines.

The main benefits of this product are the high packaging flexibility and its high electrical performance at low costs.

Application

| | |
|---|---|
| Spark energy | ≤ 65 mJ |
| Primary current | ≤ 7.5 A |
| Operating temperature range at outer core | -20 to 140°C |
| Storage temperature range | -40 to 100°C |
| Max. vibration | ≤ 250 m/s ² at 5 to 2,500 Hz |

Technical Specifications

Mechanical Data

| | |
|-----------------|-------------------|
| Length | See offer drawing |
| Weight w/o wire | < 222 g |
| Mounting | Screw fastening |

Electrical Data

| | |
|--------------------------------------|--------------------------|
| Primary resistance | 570 mOhm |
| Secondary resistance | Incapable of measurement |
| High voltage rise time | ≤ 1.9 kV/μs |
| Max. high voltage at 1 MOhm 10 pF | ≤ 35 kV |
| Spark current | ≤ 74 mA |

| | |
|----------------------------------|---------------------------------|
| Spark duration at 1 kV 1 MOhm | ≤ 2.0 ms |
| Noise suppression | Inductive and 1 kOhm resistance |
| Suppression diode / EFU | Integrated |


Characteristic

| | |
|---------------------------|---|
| Measured with power stage | IGBT IRG4BC40S (U _{ce} =600 V) |
|---------------------------|---|

Connectors and Wires

| | |
|------------------|--------------------------|
| Connector | Tyco AMP |
| Mating connector | D261.205.350-01 |
| Pin 1 | Engine GND |
| Pin 2 | U _{batt} |
| Pin 3 | ECU ignition power stage |

Characteristic dwell times [ms]

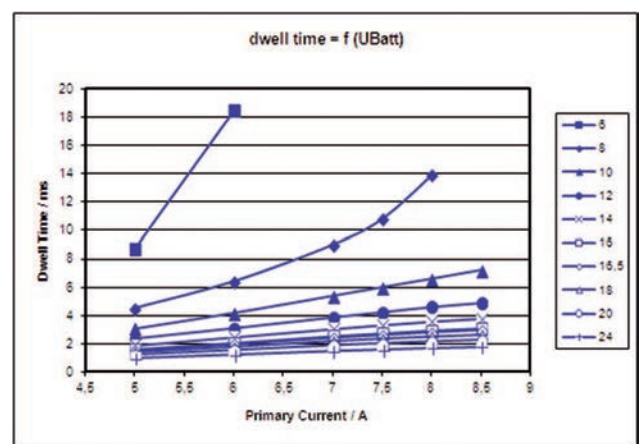


Dwell time

| | | | | | | |
|-------------------|-----------|-------|-------|-------|-------|-------|
| U _{batt} | I primary | | | | | |
| | 5.0 A | 6.0 A | 7.0 A | 7.5 A | 8.0 A | 8.5 A |

| | | | | | | |
|-------------|------|------|------|------|------|------|
| 6 V | 8.74 | 18.5 | | | | |
| 8 V | 4.5 | 6.4 | 9 | 10.8 | 13.9 | |
| 10 V | 3.1 | 4.2 | 5.4 | 6 | 6.6 | 7.2 |
| 12 V | 2.36 | 3.1 | 3.88 | 4.25 | 4.63 | 4.92 |
| 14 V | 1.9 | 2.48 | 3.05 | 3.32 | 3.57 | 3.77 |
| 16 V | 1.61 | 2.06 | 2.53 | 2.73 | 2.93 | 3.08 |
| 18 V | 1.55 | 2 | 2.43 | 2.62 | 2.81 | 2.95 |
| 20 V | 1.39 | 1.77 | 2.16 | 2.33 | 2.48 | 2.6 |
| 22 V | 1.22 | 1.54 | 1.88 | 2.02 | 2.15 | 2.26 |
| 24 V | 0.97 | 1.23 | 1.49 | 1.6 | 1.71 | 1.78 |

Measured values are without loom resistance. Loom resistance must be less than the primary resistance. The needed dwell time is to be verified through current measurement

Spark energy and provided high voltage

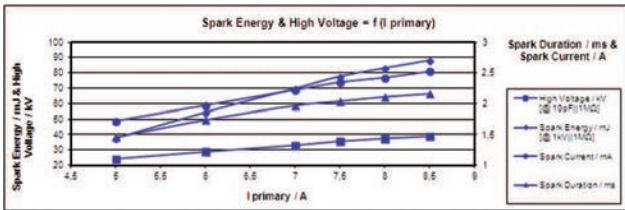

Spark energy

| I prim. | Spark energy | -duration | -current | Hi voltage |
|---------|--------------|-----------|----------|------------|
| 5 A | 37.8 mJ | 1.46 ms | 49 mA | 24.3 kV |
| 6 A | 54.5 mJ | 1,74 ms | 59 mA | 28.9 kV |
| 7 A | 69.8 mJ | 1.97 ms | 69 mA | 33.2 kV |
| 7.5 A | 77.6 mJ | 2.04 ms | 74 mA | 35.8 kV |

| | | | | |
|-------|---------|---------|-------|---------|
| 8 A | 83.0 mJ | 2.11 ms | 77 mA | 37.7 kV |
| 8.5 A | 88.0 mJ | 2.16 ms | 81 mA | 39.0 kV |

Installation Notes

During mounting of the spark plug please pay attention that full clamping and proper contacts are made to ensure safe connection between coil and spark plug.

The coil P65 has no integrated transistor and requires an ECU with internal ignition power stages, e.g. IGBT IRG4BC40S or BIP.

For technical reasons the values of the coils may vary.

Please regard the specified limit values.

Please find further application hints in the offer drawing at our homepage.

In case of ignition-caused malfunctions, please use screened sensor wires.

Design Note

We strongly recommend the design of the spark plug shaft has to ensure that there are no sharp edges in the shaft geometry due to design or machining. Only in compliance with this recommendation, a proper function can be ensured.


Ordering Information

Ignition Coil P65-WS
Order number **F02U.V01.926-01**

Accessories

High Voltage Connector angled
Please ask your local Bosch Service
Order number **0356.250.035**

Dimensions

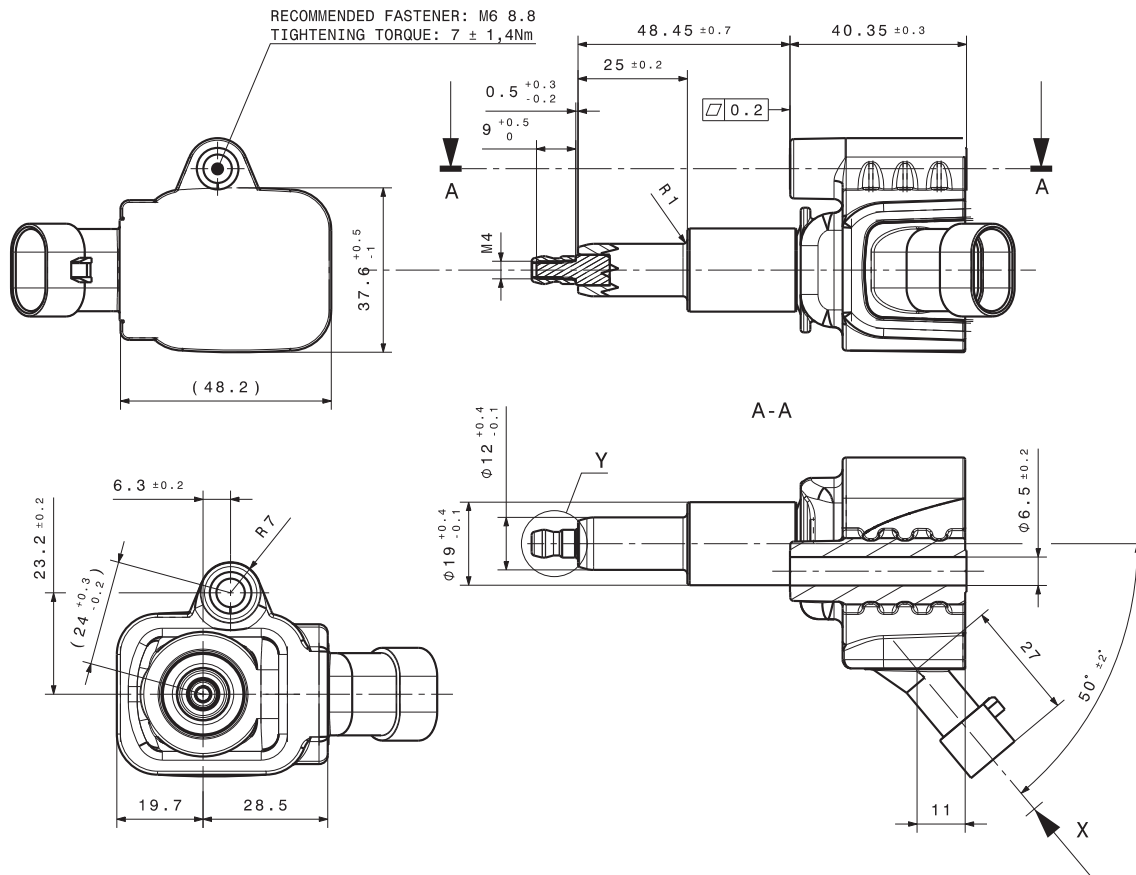

Represented by:

Europe:
 Bosch Engineering GmbH
 Motorsport
 Robert-Bosch-Allee 1
 74232 Abstatt
 Germany
 Tel.: +49 7062 911 9101
 Fax: +49 7062 911 79104
 motorsport@bosch.com
 www.bosch-motorsport.de

North America:
 Bosch Engineering North America
 Motorsport
 38000 Hills Tech Drive
 Farmington Hills, MI 48331-3417
 United States of America
 Tel.: +1 248 876 2977
 Fax: +1 248 876 7373
 motorsport@bosch.com
 www.bosch-motorsport.com

Asia-Pacific:
 Bosch Engineering Japan K.K.
 Motorsport
 18F Queen's Tower C, 2-3-5 Minato
 Mirai Nishi-ku, Yokohama-shi
 Kanagawa 220-6218
 Japan
 Tel.: +81 45 650 5610
 Fax: +81 45 650 5611
 www.bosch-motorsport.jp

Australia, New Zealand and South Africa:
 Robert Bosch Pty. Ltd
 Motorsport
 1555 Centre Road
 Clayton, Victoria, 3168
 Australia
 Tel.: +61 (3) 9541 3901
 motor.sport@au.bosch.com